



3 door

Left Opening

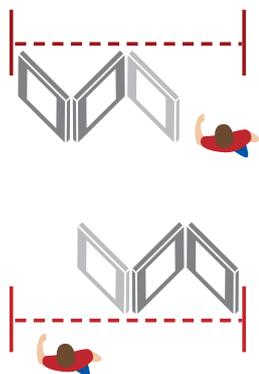


Right Opening

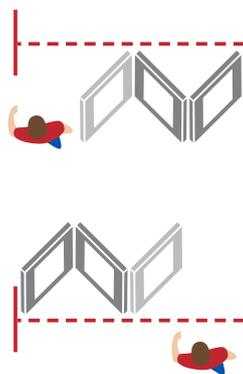


4 door

3 Left 1 Right Opening

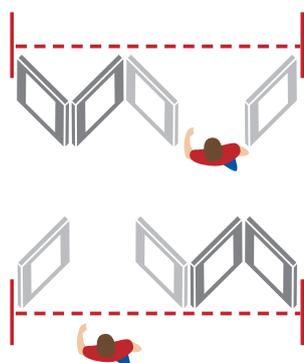

3 Right 1 Left Opening

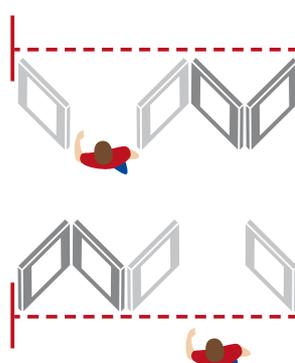

Identifies single or double opening  
doors for daily access

# Deciding the brickwork or stud wall opening sizes and preparing the site



## Very important!

Before preparing the opening in the brickwork or stud wall, you must first decide what flooring will be used and its thickness.

### Option 1

#### Floor thickness of 14mm or less

The special frame cill supplied with the set is suitable for any flooring (tiles, carpet and underlay, wood flooring) of 14mm thickness or less, as shown in Fig 1.

Flooring can be fitted up to the 15mm edge for a smoother floor line.

#### Example

Fig 1



### Option 2


#### Flooring with thickness more than 14mm

If your flooring is 14mm thick or more, you will need to raise the height of the frame by using plywood packing underneath the full length of the frame cill.

For example: if using 20mm thick flooring, you will need an 8mm plywood packer piece.

#### Example

Fig 2



For flooring less than 14mm thickness, assembled outer frame sizes are:

#### Assembled Frame Size

3 Door	2074mm high x 1790mm wide
3 Door	2074mm high x 2390mm wide
4 Door	2074mm high x 2990mm wide

The brickwork or stud wall opening height will be 2074mm + the height of the packing under the frame cill.

