



CHILD SAFE
PRODUCT


VUFOLD®

**Fitting Instructions
Micro Beadfit Blinds**


INSTALLATION INSTRUCTIONS INTU Micro Beadfit

What you will need :


Supplied :




Bracket Fitting
Tool




Top Corner
Brackets



Bottom Corner
Brackets




P Clips




Side Extrusions

Not Supplied :




Scissors


INSTALLATION STEPS
INTU Micro Beadfit

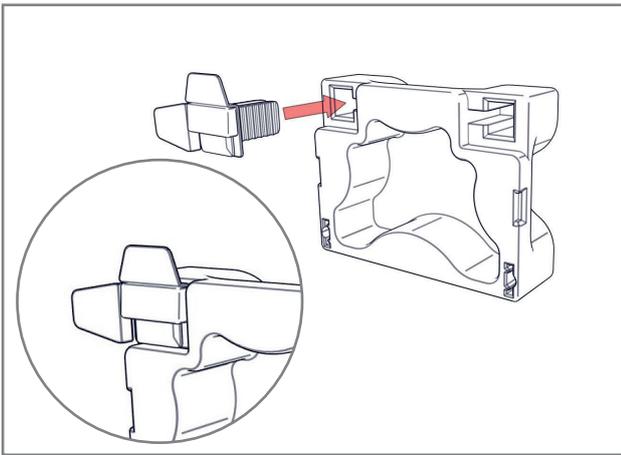


1. Place the top corner bracket into the top left slot on the bracket fitting tool.

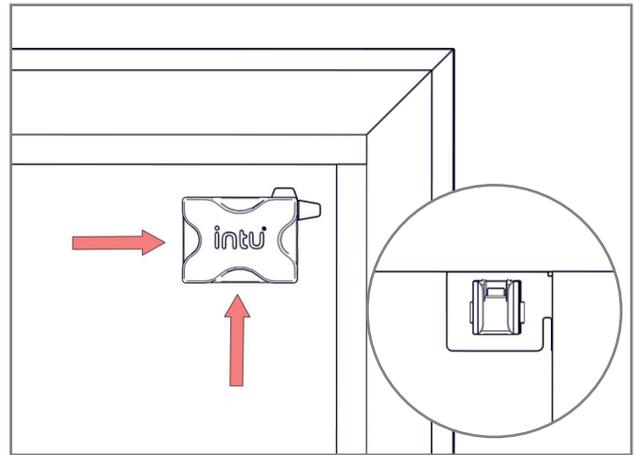


2. Position the bracket behind the rubber seal at the top right corner of the frame. Carefully push until the metal legs are behind the rubber seal. Check the bracket is square to the sides of the frame and fully secure.

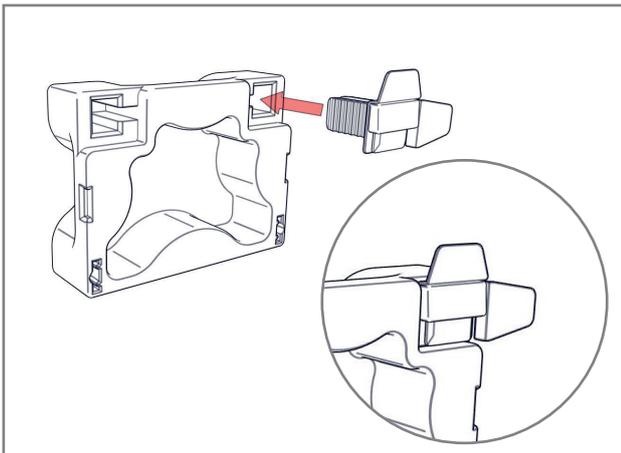


3. Place the top corner bracket into the top right slot on the bracket fitting tool.

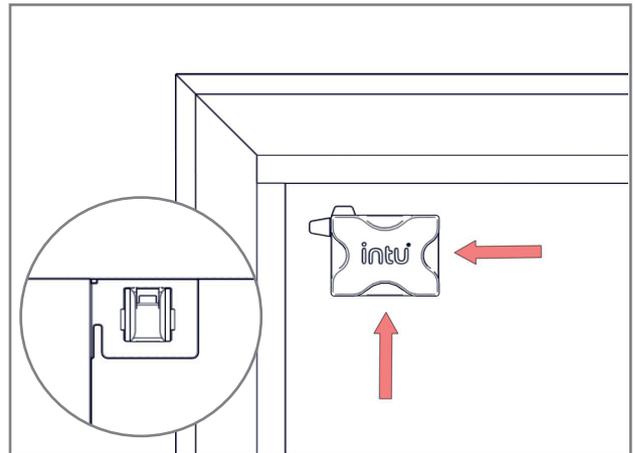


4. Position the bracket behind the rubber seal at the top left corner of the frame. Carefully push until the metal legs are behind the rubber seal. Check the bracket is square to the sides of the frame and fully secure.

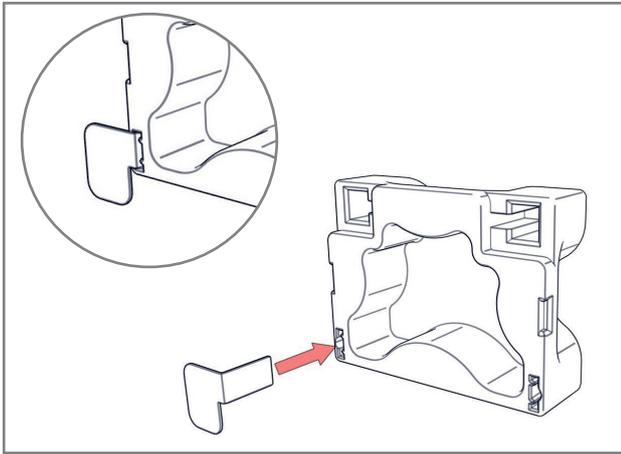


5. Place the bottom corner bracket into the bottom left slot on the bracket fitting tool.

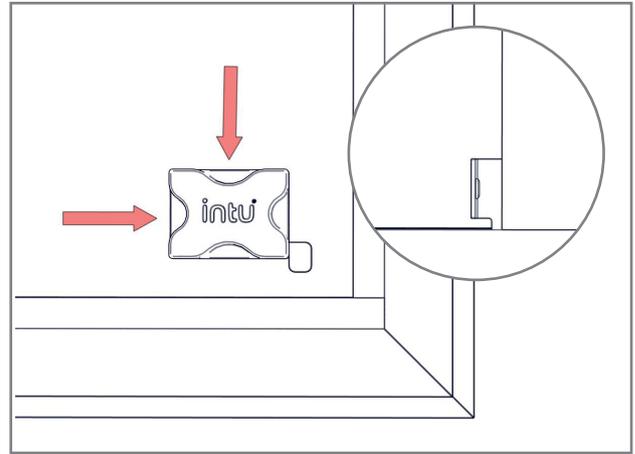


6. Position bracket behind the rubber seal at the bottom right corner of the frame. Carefully push until the metal leg is behind the rubber seal. Check the bracket is square to the sides of the frame and fully secure.

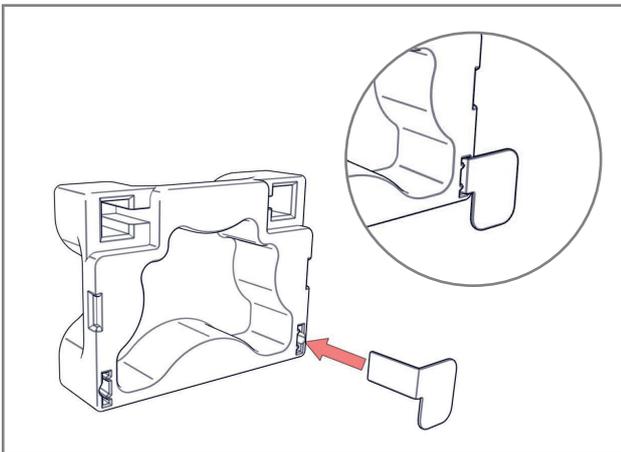


7. Place the bottom corner bracket into the bottom right slot on the bracket fitting tool.

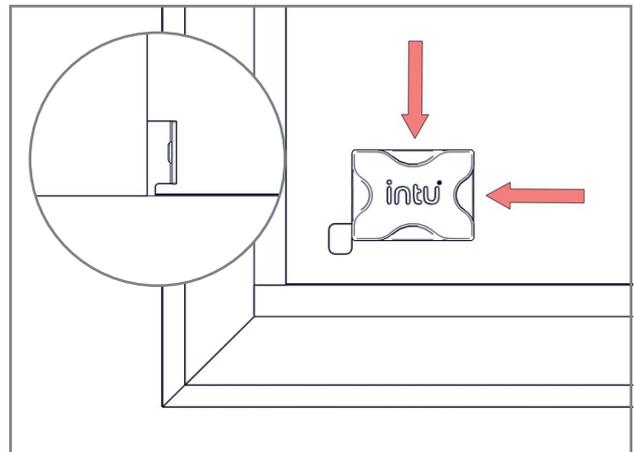


8. Position bracket behind the rubber seal at the bottom right corner of the frame. Carefully push until the metal leg is behind the rubber seal. Check the bracket is square to the sides of the frame and fully secure.

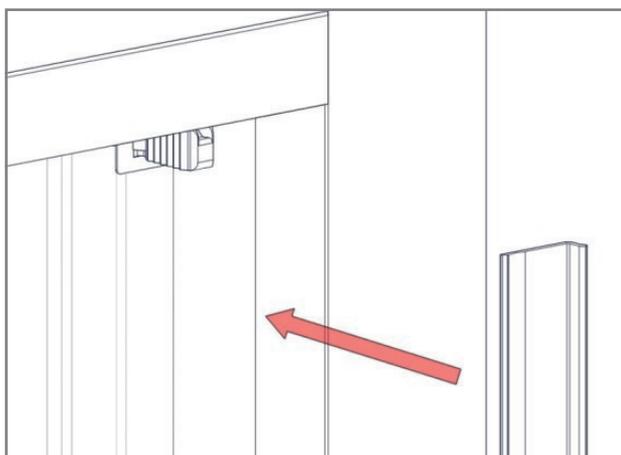


9. Place the flat side of the side extrusion against the glass with the notch to the bottom.

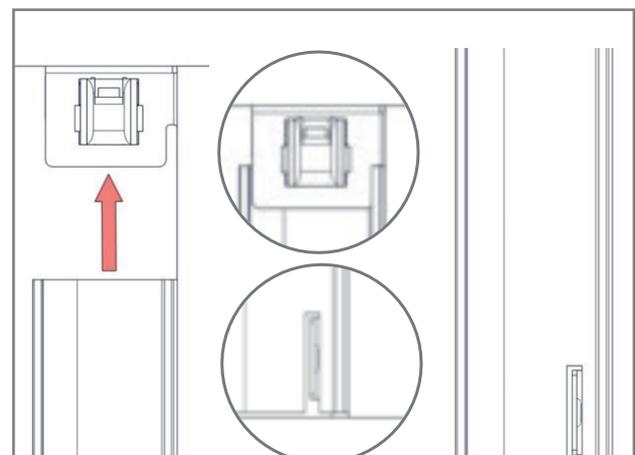


10. Slide the side extrusion up until its slots into the top corner fixing bracket. The side extrusion should rest under the bracket. Push the slot at the base of the extrusion over the bottom corner bracket. Repeat for both sides.

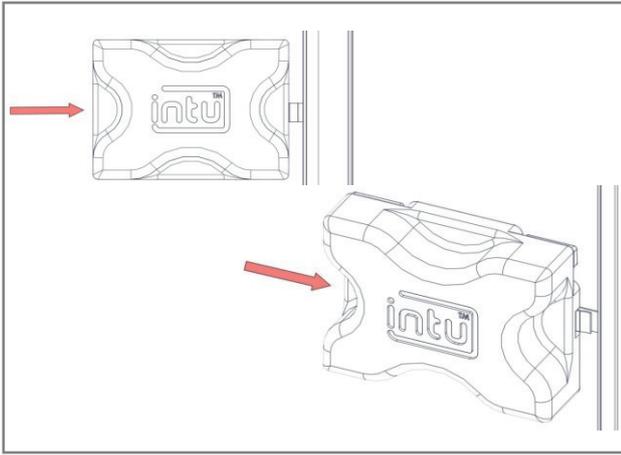


11. At the appropriate position(s) on each side profile, fit retention clips (long side profiles only). Press into position using the fitting tool.

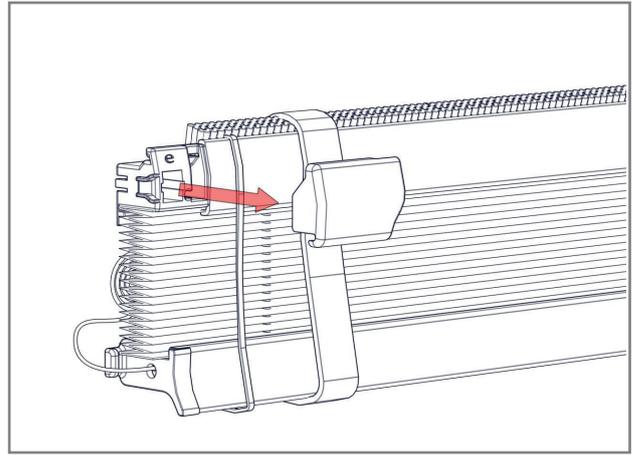


12. Remove the endcap covers from the headrail by pulling them off.

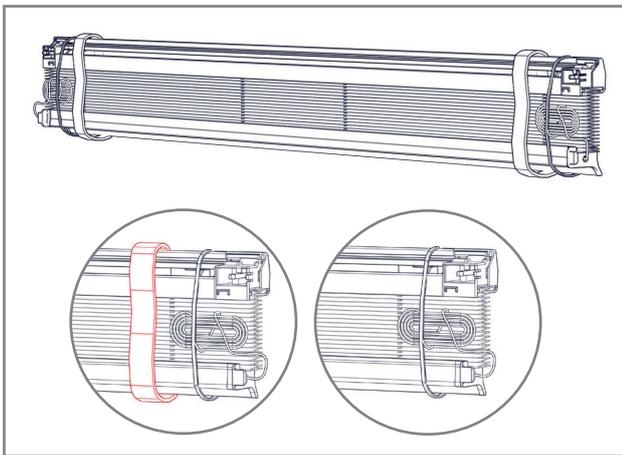


13. Remove the Velcro straps that wrap around the blind. Do not remove the elastic bands.

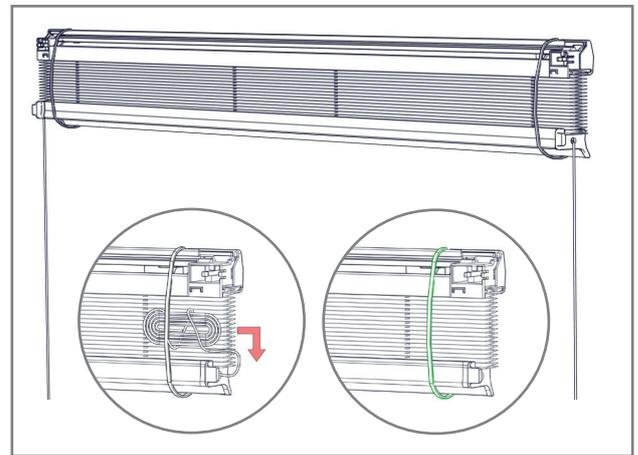


14. Remove the cords from the elastic band and allow to hang from the blind. Do not remove elastic bands from the blind.

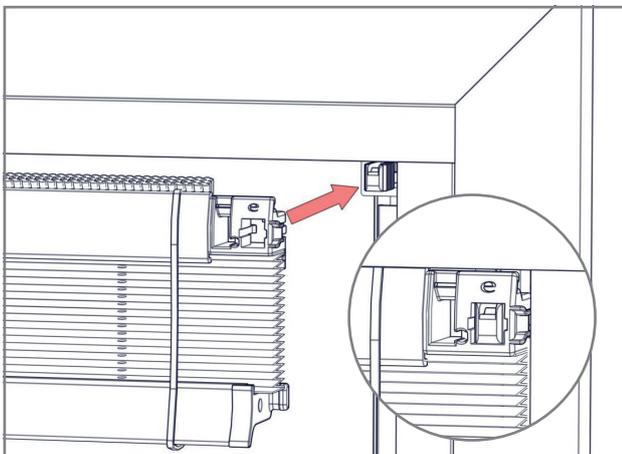


15. Align headrail endcaps with both top corner fixing brackets and push fully home. Your headrail should now be mounted to the frame.

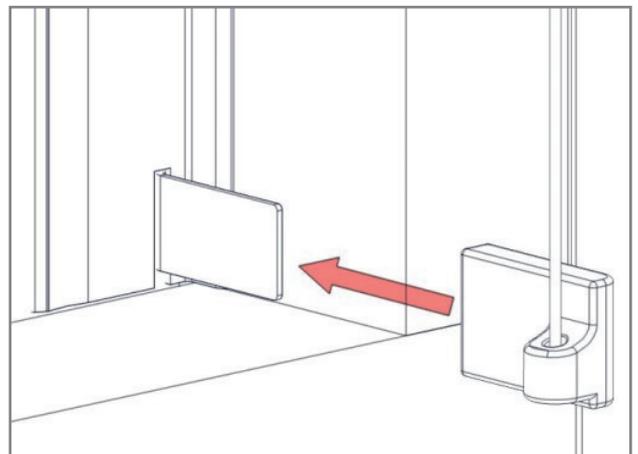


16. Align the bottom button with the bottom corner brackets. Slide the bottom button onto the bracket until it locates. Repeat for other side.

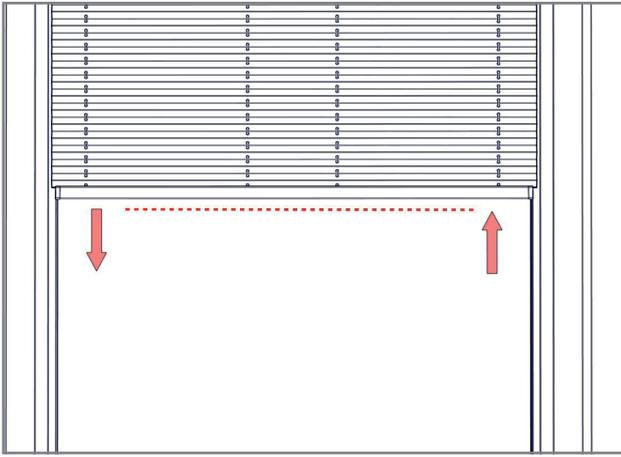

17. Cut and remove the elastic bands from the blind. Test the tension by raising the blind, ensure it stays fully raised when released. Ensure bottom bar is straight by adjusting it from side to side.

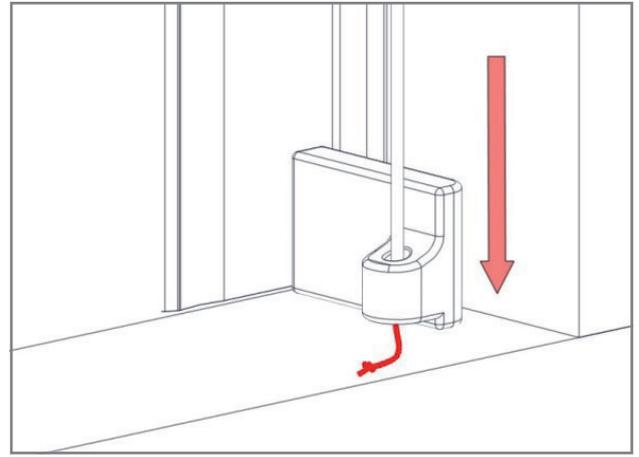

18. If your blind requires further tension, pull the cord through the hole in the bottom button until you feel the blind has sufficient tension and tie a fresh knot.

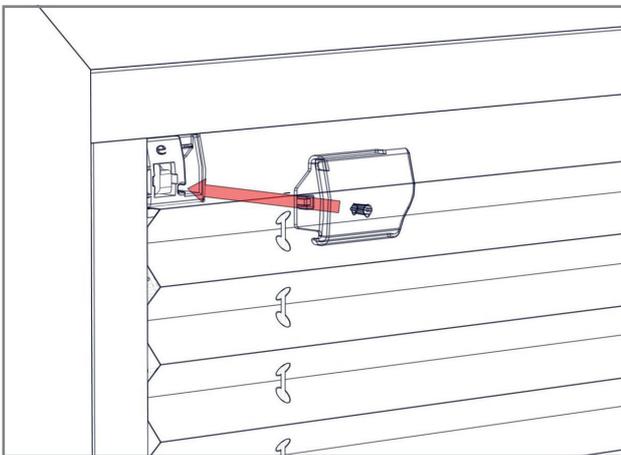

19. Re-attach the endcap covers by aligning the central post with the central hole on the endcap. Push the endcap cover in fully until a click is heard. Ensure the blind is lowered before doing this to prevent catching the fabric.



20. Your blind is now fully installed and ready to use.

CONTACT INFORMATION



Call : 01625 442899

Email : aftercare@vufold.co.uk

Web : www.vufold.co.uk



VUFOLD®